


**c-vision** is the ultimate shop floor measuring system. Its rugged design and 250 lb load capacity put advanced automatic video measurement capability to work right where you need it.

- Telecentric dual magnification optical system with advanced digital imaging technology
- vCAD™ Virtual Chart Gage software - directly compare parts to CAD
- Motorized XY table with precision linear scales and manual fine adjusters
- Internal computer with keyboard mounted on a convenient fold-down tray
- Optional fully automatic Measure-X® 2D measuring software

High Capacity Video Contour Projector®

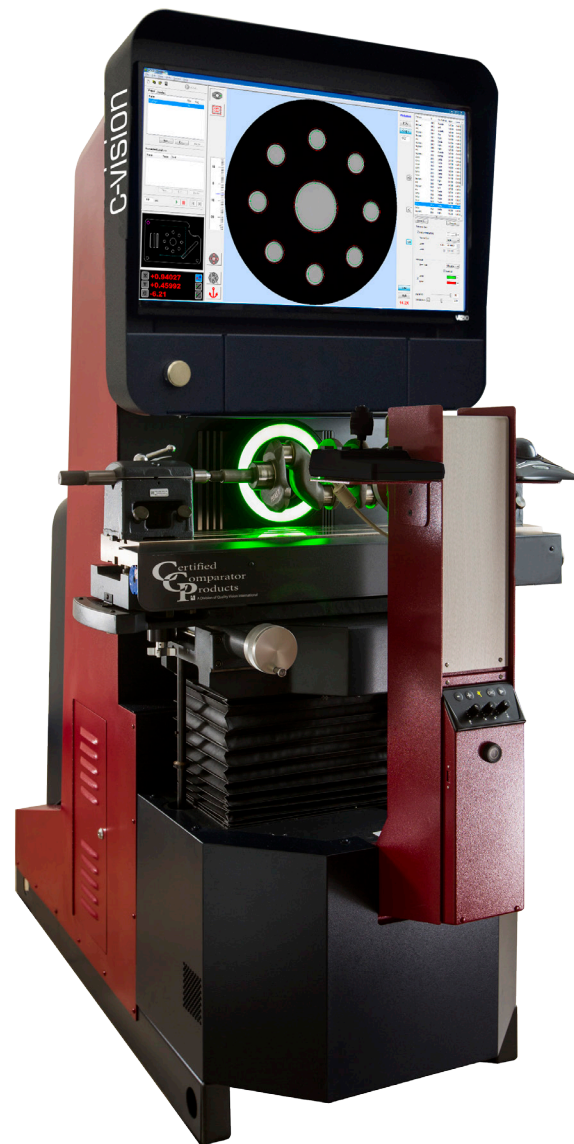


# c-vision™ Floor Model

## Metrology Software:

- vCAD™ virtual chart gage software
- Optional: Measure-X® 2D metrology software, MeasureFit®, SmartReport®, SmartTree™, CAD import option for Measure-X 2D, Measure-X 2D offline

## Available Options and Accessories:

- Extended X-axis travel
- Dual monitor user interface
- 32" monitor
- Bar code reader
- Universal fixture kit
- Rotary indexer
- Calibration standards
- Swing away lamphouse
- Worktable dust cover
- Service and support contracts

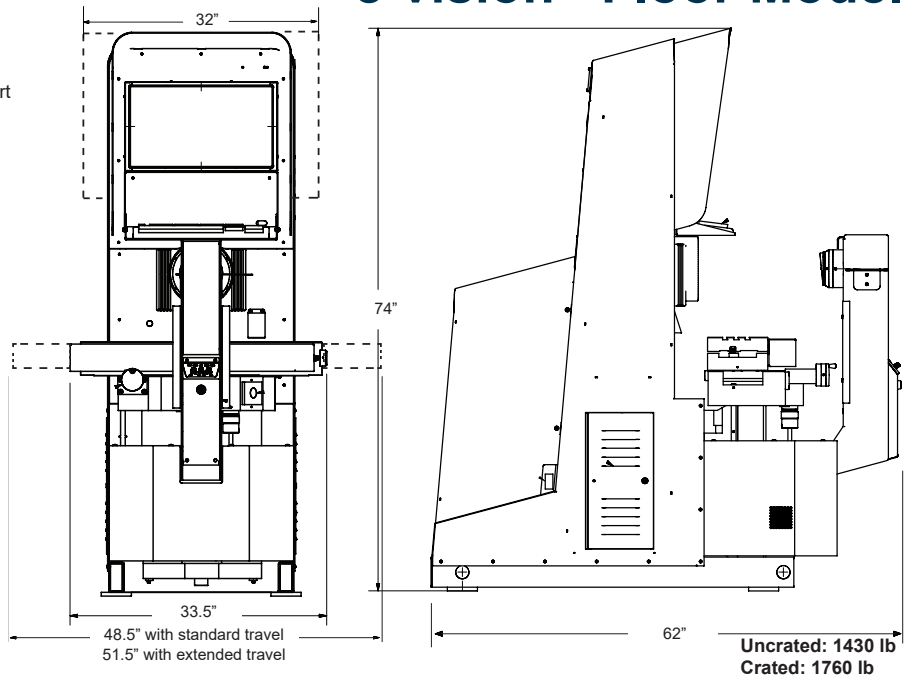

	Standard	Optional
XYZ Travel Range (in)	15 x 9 x 2	18 x 9 x 2
Helix Angle Range		±7.5° with pivoting worktable assembly and zero stop
Throat Clearance (in)	16.0	
XY Scale Resolution (in)	0.00004	0.00002
XY Drive System	Motorized with variable speed joystick control	
Worktable	Heavy duty cast iron nickel plated worktable, 32 x 8 in	
Recommended Maximum Load Capacity (lb)	250	
Optics	Dual magnification, fully telecentric, long depth of field	
Camera	QVI® High Density Megapixel Metrology Camera	QVI Large Field Megapixel Metrology Camera
FOV Size (in)	Low Mag: 3 (diagonal) High Mag: 0.75 (diagonal)	Low Mag: 4 (diameter) High Mag: 1 (diagonal)
Depth of Field (in)	Low Mag: 1.5 High Mag: 0.2	Low Mag: 2 High Mag: 0.4
Working Distance (in)	6.0	
Illumination	Green LED profile light and green LED oblique ring illuminator with eight selectable patterns	Green LED through-the-lens surface light with continuously variable intensity control
Image Processing	256 level grayscale processing with 10:1 subpixel resolution	
System Controller	QVI standard system controller with networking and communication ports*	
	*Controller configuration subject to change without notice.	
Power Requirements	100-120 VAC or 200-240 VAC, 50/60 Hz, 1 phase, 1200W	
Rated Environment	Temperature 18-22° C, stable to ±1° C; 30-80% humidity; vibration <0.001g below 15 Hz	
Operating Environment, Safe	15° - 30° C	
Stage Accuracy (E <sub>2</sub> ) <sup>1</sup>	(7.5 + L/100) μm	
Field of View Accuracy <sup>2</sup>	Low Mag: 7.5 μm High Mag: 4.0 μm	
<sup>1</sup> Where L = measuring length in mm. Applies to the highest digital magnification at high optical magnification. XY axis artifact: QVI calibration reticle P/N 640298 or 640271. <sup>2</sup> Applies to the highest digital magnification at each optical magnification. QVI calibration artifact P/N 640685 for low magnification and high magnification. Calibration artifacts must be positioned in the standard measuring plane, defined as perpendicular to the optical axis within 0.02 in, and within 0.20 in of best focus. Applies to a thermally stable system calibrated and operated within the rated environment.		



**Quality Vision International, Inc.**

Phone: +1 585 758 1300

Fax: +1 585 506 4307

ccpinfo@qvii.com

www.qvii.com/ccp

